


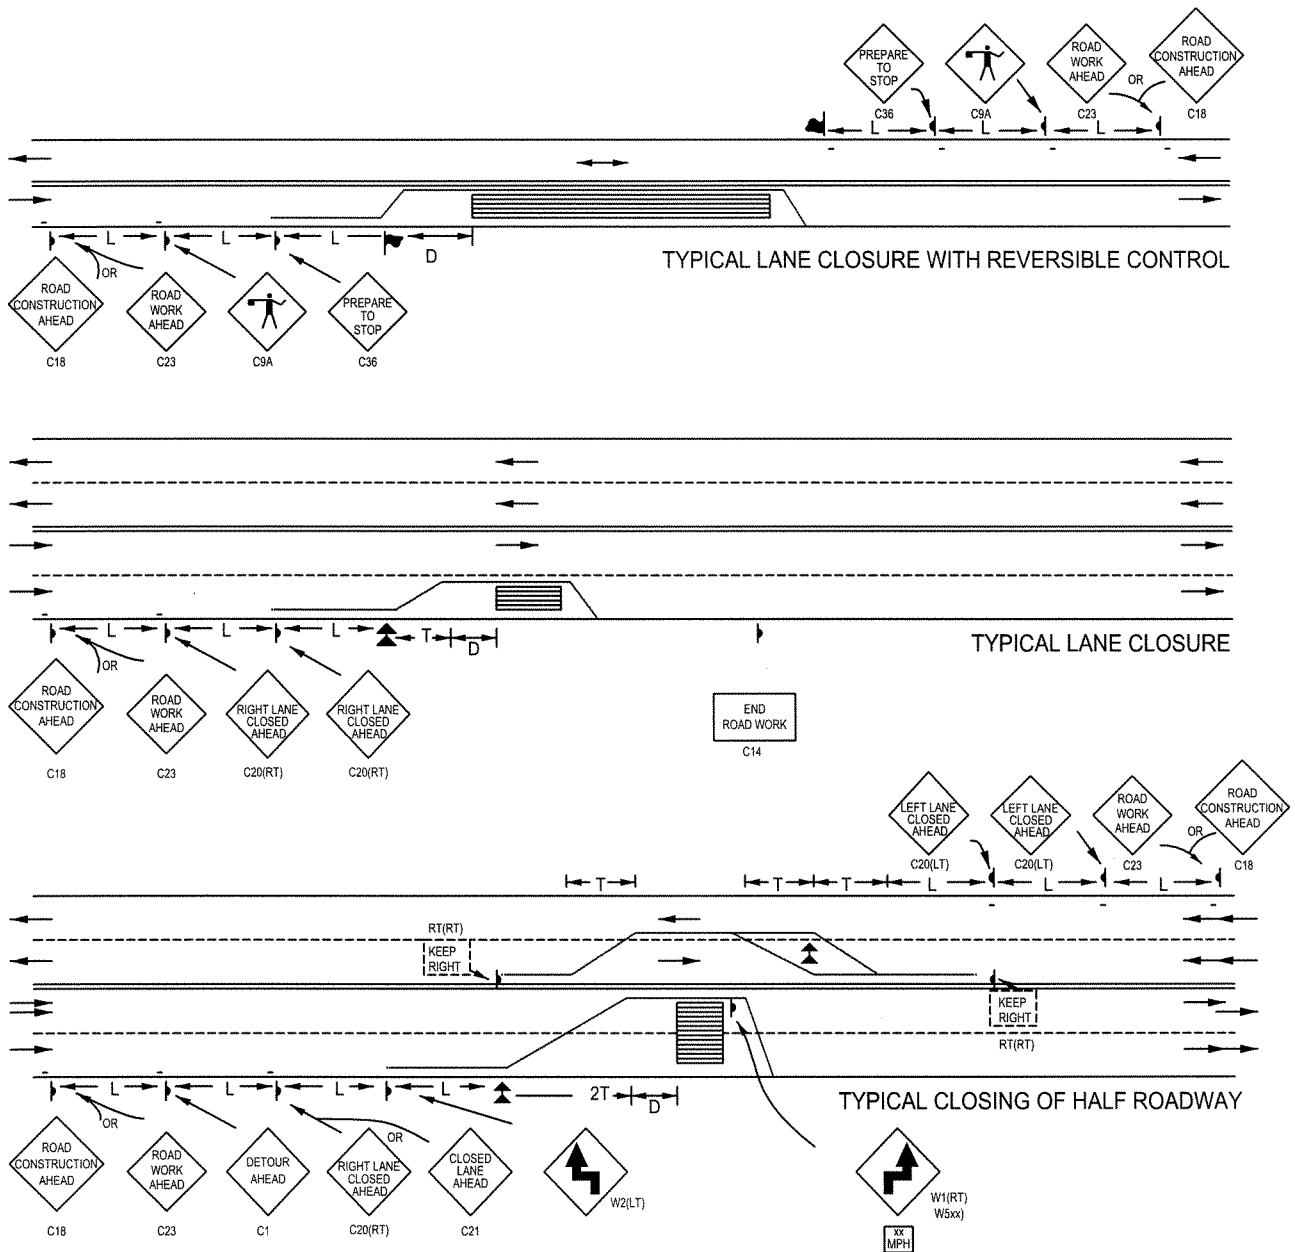

POSTED SPEED	T MINIMUM TAPER LENGTH	L MINIMUM SIGN SPACING	MAXIMUM SPACINGS OF CHANNELIZATION DEVICES		D MINIMUM BUFFER ZONE
			CONES/BARRICADES	TUBES	
25	125 (39)	125 (39)	25 (7.6)	10	150 (46)
30	180 (55)	180 (55)	30 (9.1)	15	150 (46)
35	250 (76)	250 (76)	35 (10.7)	15	150 (46)
40	325 (100)	325 (100)	40 (12.2)	20	150 (46)
45	550 (140)	550 (140)	45 (13.7)	20	150 (46)
50 +	750 (220)	750 (220)	50 (15.2)	25	150 (46)

LEGEND	
	TRAFFIC SIGN WITH FLAGS
	CHANNELIZATION DEVICE
	FLASHING ARROW SIGN
	FLAGGER
	WORK ZONE
	(00) METERS

CHG	DESCRIPTION	DATE	INITIAL
APPROVED	<i>Mad O'Leary</i>	8/20/00	
	CITY ENGINEER	DATE	

CITY OF THOUSAND OAKS
PUBLIC WORKS DEPARTMENT

STANDARD
TRAFFIC CONTROL CHART

PLATE NO.

8-15