


NOTES:

1. Install min. 5' high galvanized chain link fence as shown and set min. 1' inside R/W line in street area.
2. Posts shall be 2 1/2" I.D. galvanized pipe set in 18" dia. x 24" deep concrete foundation at 8' max. spacing.
3. A 10 gauge galvanized tension wire shall be installed at the top and bottom of fence.
4. Extend fence across sidewalk area where sidewalk exists.
5. 18" x 18" Type N-2 marker (red reflective background) of high intensity grade reflective sheeting shall be installed on each post facing oncoming traffic with City approved theft proof bolts.
6. For additional specifications see Plate No. 7-1.
7. An access gate may be required by the City Engineer. If required, it shall be designed to be locked and closed at all times when not in use.
8. A 24" x 24" W31 (END) sign shall be installed as shown.

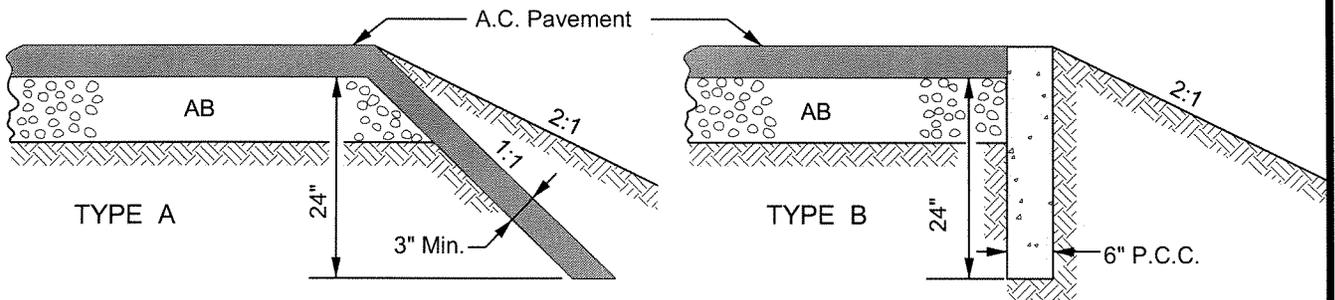

CUT-OFF WALL DETAILS

CHG	DESCRIPTION	DATE	INITIAL
APPROVED	<i>Paul D. Utter</i>	1/20/07	
	CITY ENGINEER	DATE	

CITY OF THOUSAND OAKS PUBLIC WORKS DEPARTMENT	
STANDARD TEMPORARY BARRICADE CUT-OFF-WALL	PLATE NO. 7-11