



MONOLITHIC SIDEWALK

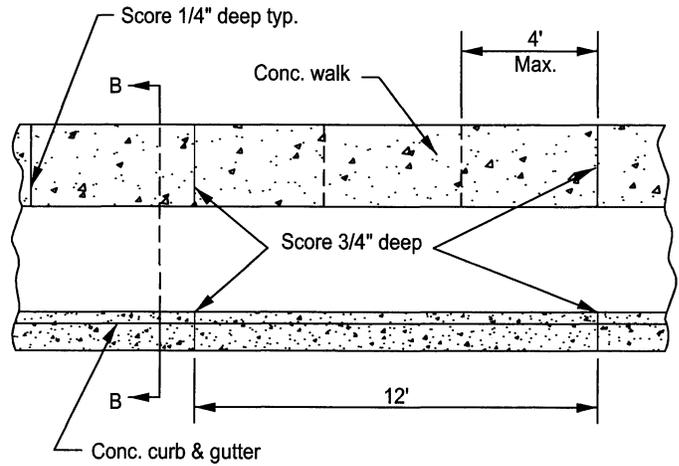


DETACHED SIDEWALK

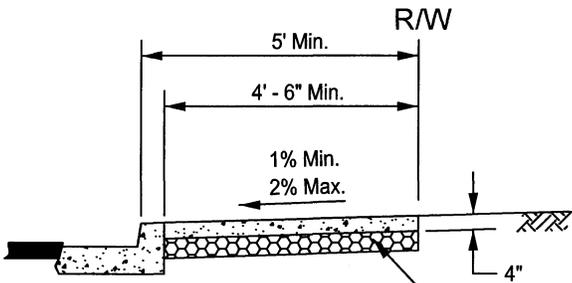


SECTION A-A

See Note 2

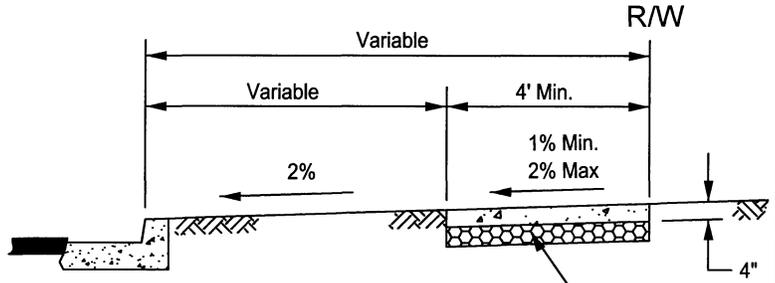


SECTION B-B

See Note 2

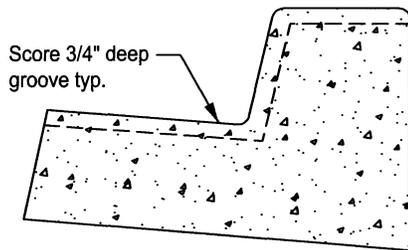

CURB & GUTTER

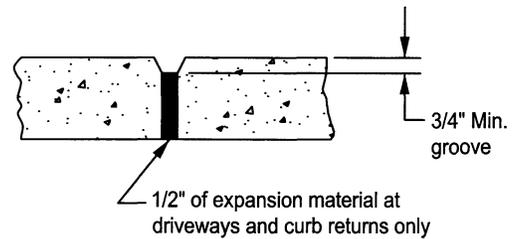

SIDEWALK

NOTES:

1. Provide full expansion joints in curbs and sidewalks at each side of driveways and at both ends of any curb return.
2. 4" A.B. to be placed under sidewalk and compacted to 90% relative compaction.
3. Removal of curb, gutter or sidewalk shall be to saw cut edges. Do not leave floating pieces < 8' long.
4. All concrete shall be 520-C-2500.
5. An accessible pathway of 4' min. width must be provided at all times. If an object (i.e.. fire hydrant, utility, etc.) is to be placed on the sidewalk, provide a sidewalk extension per Plate Nos. 8-8 or 8-9.

6	Modified Compaction Requirements	3-27-12	MAF
CHG	DESCRIPTION	DATE	INITIAL
APPROVED	<i>Jeff Burgin</i> CITY ENGINEER	3.27.12 DATE	

CITY OF THOUSAND OAKS
PUBLIC WORKS DEPARTMENT

STANDARD
SIDEWALK CONSTRUCTION,
SCORING, CROSS SLOPES

PLATE NO.
8-3