


POST DETAIL

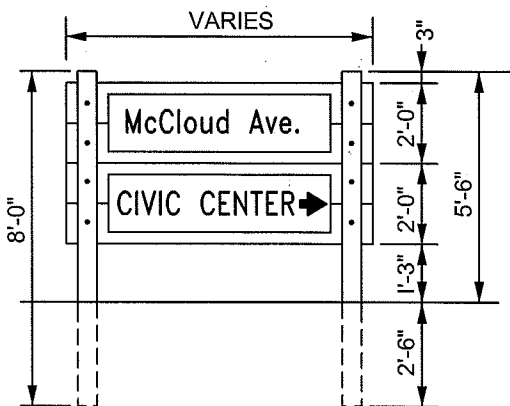

DOUBLE SIGN DETAIL

SIGN PLATE:

- 1) Shall be manufactured by applying reflective sheeting to .080 gage sheet aluminum per the SSS.
- 2) The message, border, and symbol shall be reflective white.
- 3) Type G-7 guide signs shall have green reflective backgrounds. Lettering shall be 6" upper case and 4 1/2" lowercase type E letters.
- 4) Type G-81 guide signs shall have blue reflective background. Lettering shall be 6" uppercase type E letters.
- 5) Sign plate height shall be 18" and the length shall vary according to legend length.

SIGN FRAME:

- 1) All wood shall be rough sawn redwood stained with one coat of Behr Plus 10 Solid Color Stain Tint Base 30 - Oxford Brown or equal.
- 2) Use 6 - 1/4" x 3/4" lag bolts to secure sign plate to sign frame.
- 3) Length of 2 x 12's shall vary to fit each sign plate.
- 4) See standard Plate Nos. 7-1, 7-4, and 7-5 for additional specifications.

SIGN LOCATION:

- 1) Standard location in median island, approximately 300 ft. in advance of island nose, or as determined by the City Engineer.

2	Clarify dimensioning	3-22-04	JSB	CITY OF THOUSAND OAKS PUBLIC WORKS DEPARTMENT	
CHG	DESCRIPTION	DATE	INITIAL		
APPROVED <i>[Signature]</i>				STANDARD ADVANCE ROAD NAME GUIDE SIGNS	
CITY ENGINEER				DATE 4/20/04	
				PLATE NO. 7-3	