





LOCATIONS WITHOUT CURBS

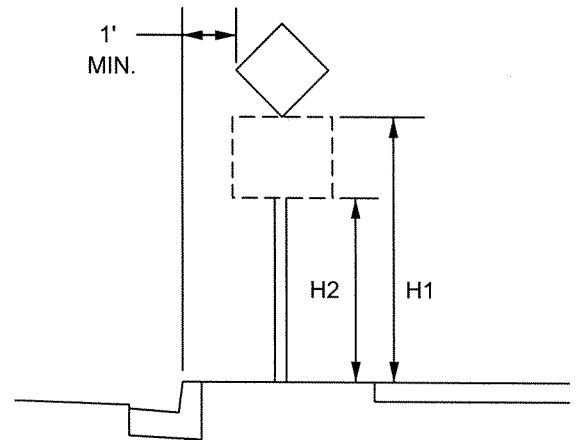

PARKWAYS

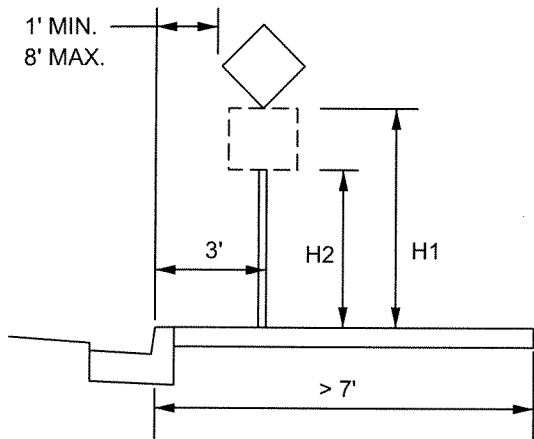

MONOLITHIC SIDEWALKS

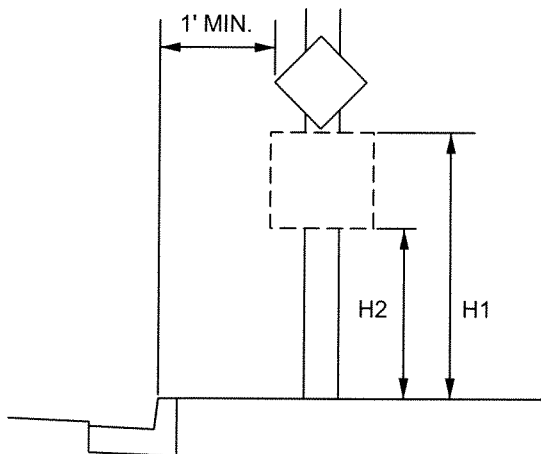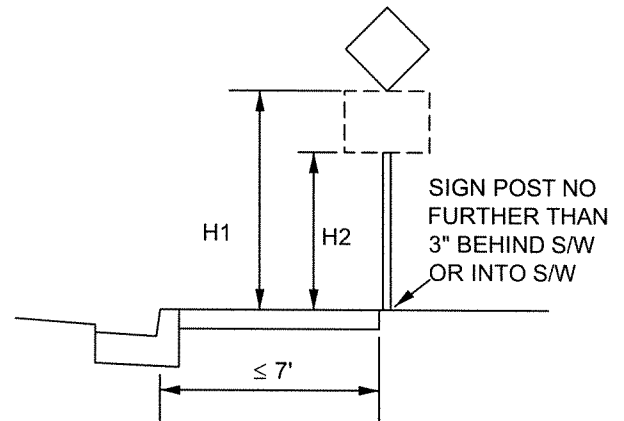

ELECTROLIERS

NOTE:

Signs shall be installed with a minimum vertical clearance (H1) of seven (7) feet. If two signs are mounted on the same post, the minimum vertical clearance (H2) shall be 80". Signs shall be mounted on electroliers when possible. If sign location reduces the required 4' min. width of accessible pathway, provide sidewalk extension per Plate No. 8-9. Mount signs with offset brackets as needed.

CHG	DESCRIPTION	DATE	INITIAL
APPROVED	<i>Paul D. With</i>	5/20/07	
	CITY ENGINEER	DATE	

CITY OF THOUSAND OAKS  
PUBLIC WORKS DEPARTMENT

STANDARD  
LOCATION OF SIGNS ON  
RIGHT SIDE OF ROADS

PLATE NO.

7-9