




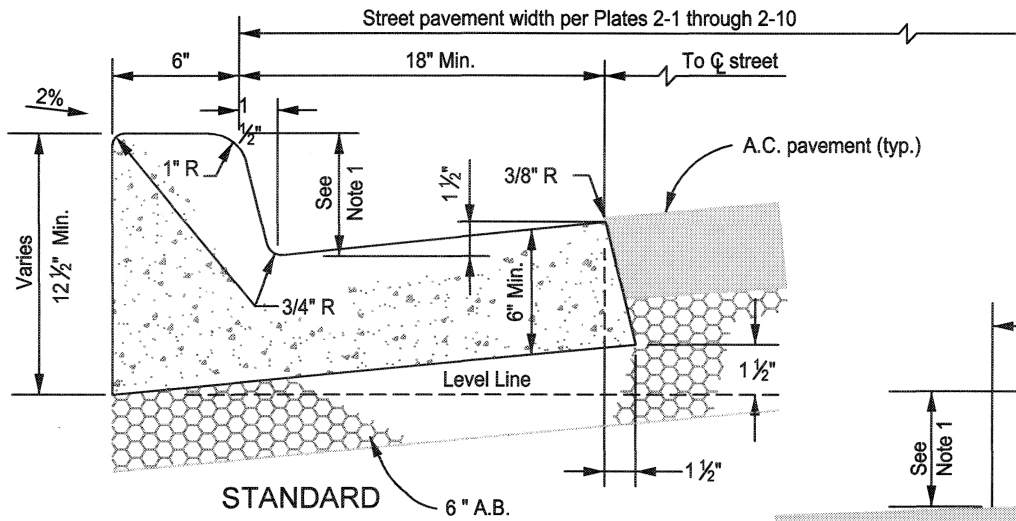


STANDARD
CURB & GUTTER
TYPE A-2

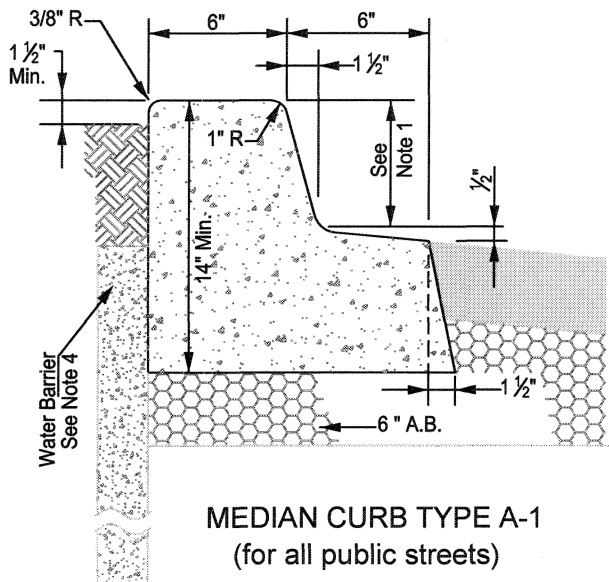


MEDIAN CURB TYPE A-1
(for all public streets)

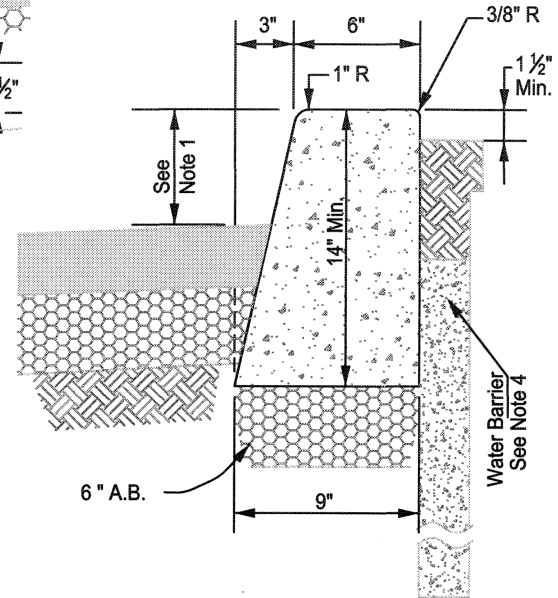

MEDIAN / PLANTER CURB TYPE A
(for private streets or parking lots)

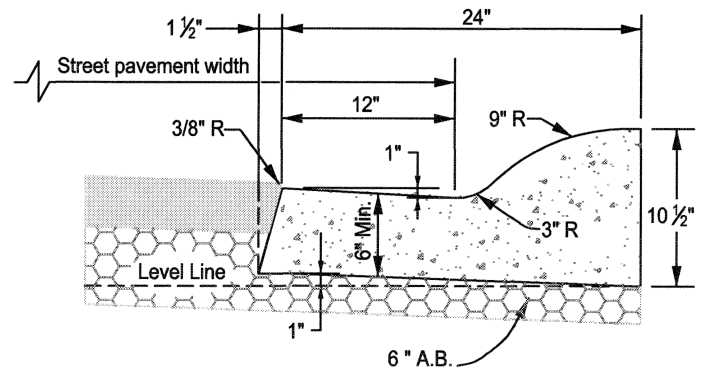

ROLLED CURB DETAIL

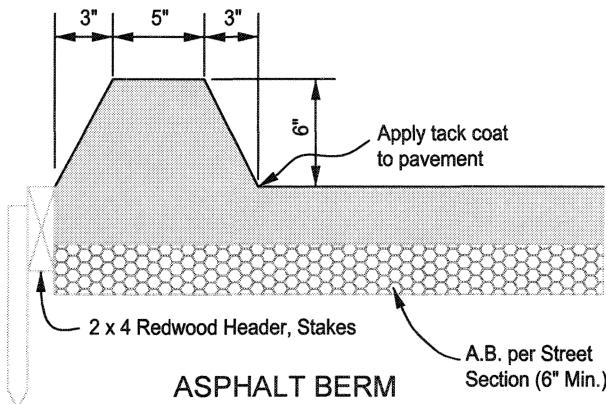

ASPHALT BERM

NOTES:

1. 6" min. curb height.
2. All concrete shall be 520-C-2500.
3. Curb cores shall be positioned per plate 8-20
4. Median and planter curbs shall include barrier to prevent migration/intrusion of water into adjacent pavement or base, to the satisfaction of the City Engineer.

6	Added Water Barrier at Planter Curbs	3-27-12	MAF
5	Add Dimension for Median Curb	10-22-08	MAF
4	Clarify AB Section	12-15-04	JTS
CHG	DESCRIPTION	DATE	INITIAL

APPROVED

Ray A. Durkin
CITY ENGINEER

3-27-12
DATE

CITY OF THOUSAND OAKS
PUBLIC WORKS DEPARTMENT

STANDARD
CONCRETE CURB & GUTTER,
MEDIAN CURB, A.C. BERM

PLATE NO.

8-2