




MONOLITHIC SIDEWALK

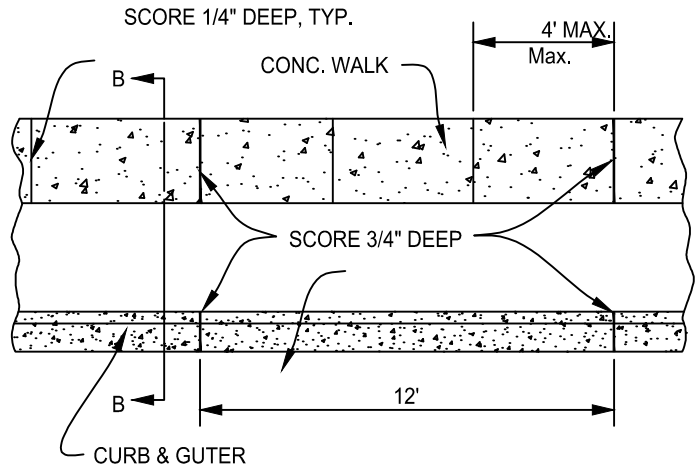


DETACHED SIDEWALK

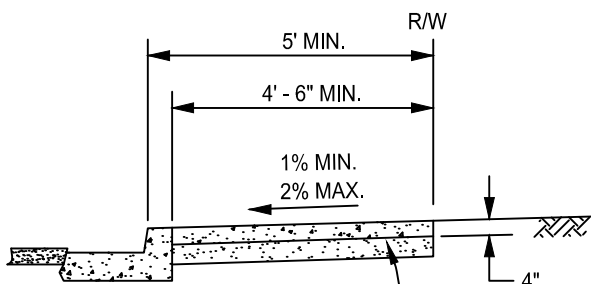


SECTION A-A

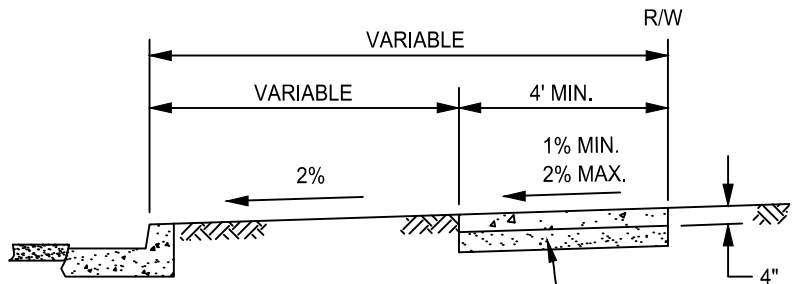

SECTION B-B

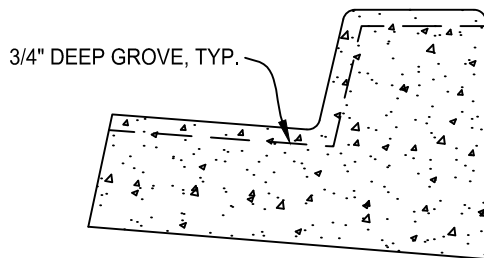

CURB & GUTTER

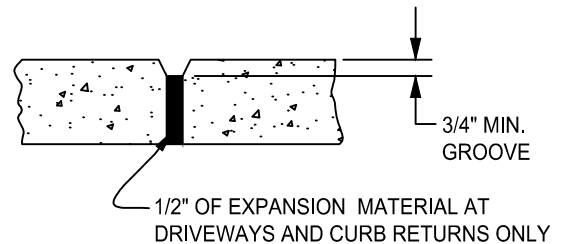

SIDEWALK

DETAILS
NOT TO SCALE

NOTES:

1. PROVIDE $\frac{3}{4}$ " DEEP SCORE LINE IN CURBS AND SIDEWALK AT EACH SIDE OF DRIVEWAY AND AT BOTH ENDS OF ANY CURB RETURN.
2. 4" A.B. TO BE PLACED UNDER SIDEWALK AND COMPACTED TO 90% RELATIVE COMPACTION.
3. REMOVAL OF CURB, GUTTER OR SIDEWALK SHALL BE TO SAW CUT EDGES. DO NOT LEAVE FLOATING PIECES < 8' LONG.
4. ALL CONCRETE SHALL BE 520-C-2500.
5. AN ACCESSIBLE PATHWAY OF 4' MIN. WIDTH MUST BE PROVIDED AT ALL TIMES. IF AN OBJECT (I.E., FIRE HYDRANT, UTILITY, ETC.) IS TO BE PLACED ON THE SIDEWALK, PROVIDE A SIDEWALK EXTENSION PER PLATE NOS. 8-8 OR 8-9.

CHANGE	DESCRIPTION	DATE	INITIAL	APPROVED: <i>Cliff F. [Signature]</i> CITY ENGINEER	5/21/18 DATE
--------	-------------	------	---------	--	-----------------