




**SPEED HUMP DETAIL**  
SCALE: 1" = 10'

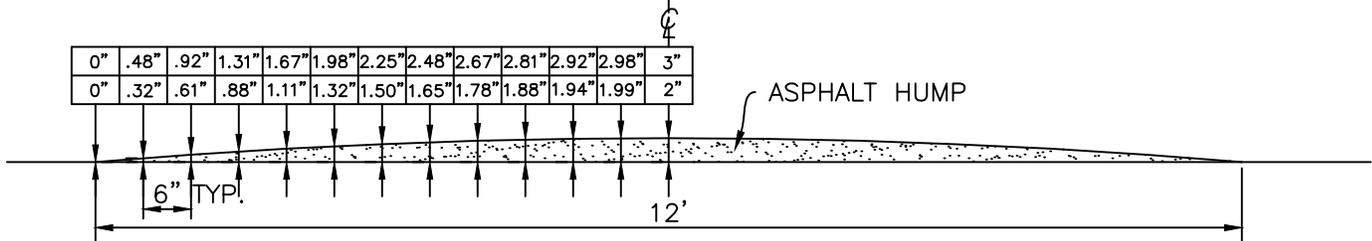

**SECTION A-A**  
SCALE: 1" = 2'

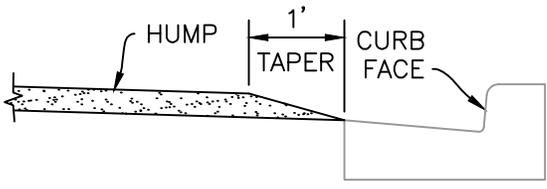

**SECTION B-B**  
SCALE: 1" = 2'



**SIGN DETAIL**  
NOT TO SCALE

**NOTES:**

1. ALL PAVEMENT MARKINGS, LEGENDS AND STRIPING, SHALL BE WHITE SPRAYABLE THERMOPLASTIC, PER CA MUTCD FIGURE 3B-29, OPTION C.
2. NEW SIGNS AND POST SHALL BE INSTALLED PER CITY STANDARDS.
3. REMOVE CONFLICTING STRIPING BY WET SAND-BLASTING.
4. ALL PAVEMENT MARKINGS, LEGENDS AND ARROW MARKINGS SHALL BE INSTALLED AS SHOWN ON THE PLANS.
5. BASE ALL MEASUREMENTS OFF OF CENTERLINE OF ROADWAY. HUMPS TO BE CENTERED IN THE TRAVEL LANES.
6. DO NOT PLACE HUMPS OVER MANHOLES, VALVES, AND JUNCTION STRUCTURES.
7. EDGE OF HUMPS SHALL BE 10 FT. MIN. FROM EDGE OF UPHILL DRIVEWAY.
8. PLACE AT PROPERTY LINES INSTEAD AT MID-LOT AND ADJACENT TO STREET LIGHTS (WHERE EVER POSSIBLE).

CHANGE	DESCRIPTION	DATE	INITIAL	APPROVED:	DATE: 5/24/18
--------	-------------	------	---------	-----------	---------------